



EN

INSTALLATION AND USER'S MANUAL

VULX FUSION BARBEQUE TABLE

You've just acquired a VULX branded product.
This product has been manufactured with care and submitted to many control tests, certifying it to CE EN 498 et EN 1860-1 standards.

Please read this manual carefully to use and maintain your VULX FUSION barbeque table safely and correctly.

Please keep this installations and user's manual safely.



CONTENT

1. GENERAL SAFETY INSTRUCTIONS
2. ASSEMBLY
 - 2.1. GAS SYSTEM
 - 2.2. FROM GAS TO WOOD AND BACK
 - 2.3. FROM HIGH BAR TO COFFEE TABLE, AND BACK
3. USE
4. COOKING
5. MAINTENANCE
6. GAS SPECIFICATIONS
7. WARRANTY
8. ACCESSORIES



1. GENERAL SAFETY INSTRUCTIONS

Before use, check that no part or element of the VULX barbecue table is deformed, damaged or unscrewed.

Before use, check that no part or element of the VULX FUSION barbecue table is deformed, damaged or unscrewed.

- **Only for use outside**
- **Consult the instructions before using**
- **CAUTION: Accessible parts can be very hot. Keep away from young children**
- **This device must be kept away from flammable materials during use**
- **Do not move the device when using**
- **Close the gas valve after use**
- **Do not modify the device**
- **Do not close the ventilation openings of the gas cylinder's slot**
- **The propane gas cylinder must be replaced when necessary (away from any source of fire)**
- **Do not use in enclosed spaces!**
- **WARNING! This barbecue will become very hot. Do not move during use.**
- **Never spray with water to extinguish the flame!**



WARNING! Do not use alcohol or gasoline to ignite or reactivate the fire! Only use firelighters that comply with EN 1860-3 standard!

WARNING! Do not leave the barbecue accessible to children and pets.





2. ASSEMBLY

Please observe the installation instructions.


The VULX FUSION barbecue table must be installed on a horizontal and stable support, before use.

NECESSARY TOOLS

- 2 wrenches size 13 (fork, ring or pipe wrenches)
- 1 screwing device or screwdriver

Fixation of wheels and feet on barbecue table with 100 cm high base

Carefully lay down your VULX, then fix on the bottom plate, door side, the 2 wheels with 8 M8x20 screws and 8 M8 fastening nut. Then adjust the height of the 2 adjustable feet at 12,5 cm.

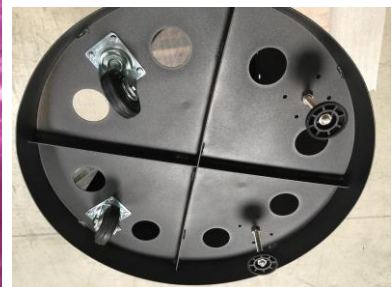



Fixation of table plate

Arrange the 3 elements of the table plate on the supports considering the same spacing between the tray and the cooking plate.

Then fix the 3 parts of the table plate with the provided 24 screws and 24 washers, in the inserts.

CAUTION: ALWAYS USE 1 WASHER PER SCREW

Screw on gently with a screwdriver or a screwing device (speed 1).



2.1. GAS SYSTEM

Gas cylinder installation

Please use only a gas cylinder of PROPANE NF gas.

Please only use a regulator, in compliance with the current European standards and compatible with your LP gas cylinder.

Place the gas cylinder in the centre of the base of your VULX MAGMA barbecue table.



Place the gas cylinder in the center of the base of your VULX FUSION barbecue table.



Gas flexible hose installation

Use a flexible propan gas hose complying with the NF standard to connect the device to the gas cylinder with a minimum length of 80 cm, which will be connected to the burner by a standard 1/2 "nut and to the regulator 37 mbar with a standard 20x150mm nut.

Pass the flexible hose through the hole placed under the burner control panel and route it to the gas cylinder location.



Please respect the gas hose replacement order as stipulated by the NF standard about that hose.



2.2. FROM WOOD SYSTEM TO GAS SYSTEM AND BACK

Gas system disassembly:


Remove the central part of the stainless-steel cooking plate, then the outer part.



Unscrew the 2 thumbscrews from the firewall plates, which surround the gas burner tubes at the control buttons.




Unscrew the gas hose at the burner, and then retract it at the hole.

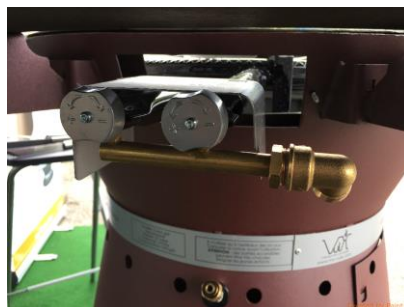



Then, remove gas burner by extracting it from the VULX FUSION barbeque table.

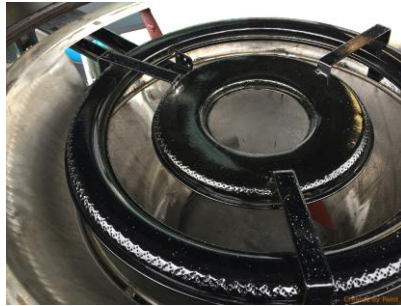

Let the gas bowl, and then install the wood bowl in the gas bowl, and the outside of the stainless-steel cooking plate.



CAUTION!
ALWAYS REMOVE THE GAS CYLINDER LOCATED IN THE BASE,
BEFORE USING THE VULX FUSION BARBEQUE TABLE IN WOOD OPERATION!


To switch from wood use to gas use, follow these instructions in reverse.



2-3- FROM HIGH BAR TO COFFEE TABLE, AND BACK

Remove the cooking plate and the wood or gas system (see chapter 2-2)

Unscrew the 3 thumbscrews connecting the upper part of the lower part.

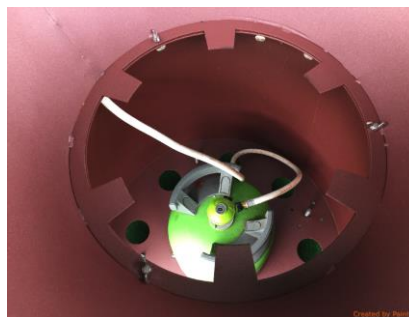

Remove the top part with the base plate, and then lay it on the other base (high bar or coffee table).

Then screw in the 3 thumbscrews and reinstall the combustion system and the cooking plate.



3. USE

Gas system

Open the gas arrival by turning on the gas cylinder valve. You can optionally, briefly press the regulator button to flush the air stuck into the hose. Then open the small burner gas by turning the center knob to the left.

1/2 a turn is enough to switch on the gas to full.



Use a fire lighter between the openings of the cooking plate. Check that the burner is properly ignited, then switch on the other burner according to your needs by turning the right knob to the left.

The left knob controls the small burner located in the center of the stainless-steel plate (grid). The right knob controls the large burner.

When one the burners are in use, the other can be turned on without using a fire lighter.

THE GAS BURNER MAY WHISTLE SLIGHTLY IN THE BEGINNING OF USE BUT THIS ONLY LASTS A FEW MINUTES.

In case of ignition problems, check that the regulator valve is open, or if the gas cylinder is not empty, or if there is no leak in the gas circuit (flexible hose, connection...).



Let the cooking plate heat at full power for 10 minutes before cooking.

Then regulate the power of the burners according to your needs. Stop the burners using the control knobs by turning them to the right when you want to stop using the VULX FUSION barbeque table.

After every use, close the gas arrival on the gas cylinder.

WOOD system

Spread crumpled newspaper (glossy paper is not recommended) into the wood cauldron, then small dry branches of wood, then small (cracked) logs. Ignite the paper. If necessary, use firelighters in accordance with EN 1860-3. Once the fire starts, you can proceed with the wooden loading.

Fill the firebox with logs of dry wood, which does not exceed 33 cm length.

The VULX FUSION barbeque table must be heated with dry wood for at least 30 minutes and the fuel must be kept incandescent before the first cooking.

Before cooking, wait for a layer of ash to cover the fuel.

4. COOKING

Oil the cooking plate before first use with cooking oil.

The cooking plate is warmer in the center than outside.
Place slow-cooking foods on the outside of the baking tray.
Place the foods to be grilled into the baking tray.

Push the residues and cooking fat off the plate directly into the central slots using a suitable food-grade metal spatula or squeegee.



5. MAINTENANCE

Maintenance and cleaning must be done after the appliance has completely cooled down.

When the fireplace is completely cold after use, remove the grease trap located above the gas cylinder, empty it and clean it before further use.

For wood use, when the fireplace is completely cold after use, empty and clean the cauldron thoroughly before using again. Either using a shovel, or by removing the cooking plate, and emptying the cauldron.



To ensure a longer lifetime, store the VULX FUSION barbecue table in an enclosed, dry place, or use our waterproof cover.

Move the VULX FUSION barbecue table by lifting it lightly by the 2 table supports, located to the opposite of the door. Then roll it.



**NEVER RAISE THE VULX FUSION BARBEQUE TABLE BY CARRYING IT THROUGH THE TABLE PLATE.
ALWAYS RAISE IT THROUGH UNDER STEEL SUPPORT.**

6- GAS SPECIFICATION

MODEL T-500
BRAND: OPTIMGAS S.L
CATEGORY: II 2^E+3+
TYPE: A1
G-30 + G-31
Q: 1,11 Kg/h
P: 37 mbar Propan
Somme Q n (P.C.I)= 15,5 Kw



7. WARRANTY

This VULX FUSION barbecue table has a guarantee of 2 years.
This device is guaranteed against any manufacturing defect and guarantees correct functioning for 2 years from the date of delivery.

The warranty is only valid if the appliance has been used under normal conditions of use according to the instructions in this manual.

This warranty does not apply in the case of damage caused by a fall.

The provisions of this warranty are not exclusive of the benefit to the purchaser of the legal warranty for defects and latent defects, which applies in any event under the conditions of the current legislation.

Place of jurisdiction: Clermont-Ferrand (France)

Serial number:

Installation date:

VULX France

SEGUIN Duteriez
ZI de LHERAT
F-63310 RANDAN
France



8. ACCESSORIES

Waterproof protecting cover



WARNING : Always wait until the cooking plates are cold, before installing protecting cover

Protection lid



The lid makes it possible to suffocate and extinguish the wood or charcoal fireplace



Compact tray



Place the Compact tray in the center of the barbecue table. It rests on the 6 supports of the external table.

WARNING : Always wait until the cooking plates are cold, before installing the compact tray.

Central grill for wood fireplace



Place the tripod on the 3 pins of the cooking plate, then using the VULX tool for place or remove the central grill.



Champagne bucket kit



The champagne bucket kit includes the support and the bucket.
If the VULX FUSION barbeque table operates on gas system, the gas burner and the central cooking plate (cold) must be removed before placing the bucket. See chapter 2.2.

Place the bucket support then put the champagne bucket.



Ethanol burner kit



If the VULX FUSION barbecue table operates on gas system, removed the central cooking plate (cold).

Place the ethanol burner.

Fill the ethanol burner with a funnel, through the filling hole accessible once the shutter is in the closed position on the burner.

**WARNING: NEVER FILL THE BURNER WHEN IT IS HOT.
ALWAYS WAIT FOR IT TO COLD.**

Open the shutter and light the Ethanol burner with the fire starter

To turn off the burner, close the shutter on the ethanol fireplace

Warning: Hot part

